

DC amplifier

Model 136



Key features

- Three-channel DC differential voltage amplifier
- 200 kHz bandwidth (-3dB corner)
- Auto-zero and shunt calibration
- Gain range 0 to 1000
- Four selectable excitation voltage levels
- 12 VDC power option
- Default 4-pole Butterworth low-pass filter
- Optional low-pass filter module with different corner frequencies

Description

Endevco® model 136 is a three-channel, DC amplifier that is manually or computer programmable. Manual control is accomplished at the front panel by means of a "select channel" push-button, three (3) "channel LEDs", one "select function" push-button, five "function LEDs", a four character LED display, showing the state of each function/channel, and four "edit" push-buttons to change the entries in the LED display. There are three LEDs used as fault status indicators for the auto zero function.

There are two modes of operation, normal and programming/setup. Both modes of operation utilize the front panel LED display. In the normal mode, there are two states, monitoring mode and no-monitoring. In the monitoring mode the LED display indicates the RMS reading of the signal present at the output of the selected channel. The non-monitoring mode turns off the LED display for lower noise applications and to minimize power consumption. In the programming mode, the unit is ready for manual programming or editing of existing channel setups. The unit will automatically return to the normal mode of operation after 20 seconds of inactivity of the front panel or after pressing the "select function" push-button while the "monitoring state" function LED is flashing.

The rear panel contains (on a per-channel basis) a BNC output connector, a 9-pin "D" input connector, the RS-232 connector (RS-232 communication is no longer supported), and the input power connector. Three model 136 units may be configured in a 19-inch rack mount adapter. The standard unit is powered by 90-264 VAC, 50/60 Hz. The -1 option is powered by 9 to 18 VDC, making it ideal for portable use or for automobile test applications.

DC amplifier | Model 136

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.


Specifications	
Inputs	
Input impedance	1 Meg Ohm minimum
Input range: differential	0 to ±10 VDC or peak VAC, 9 pin "D" connector for each bridge sensor
Common mode	±10 VDC or pk VAC, inclusive of signal 50 Vpk without damage
Common mode rejection	70 dB minimum, 200Ω or less input imbalance, DC to 60 kHz
Input imbalance adjustment	±100 mVDC, 100 ≤ gain ≤ 1000 ±1 VDC, 10 ≤ gain ≤ 100 ±10 VDC, 0 ≤ gain ≤ 10
Outputs	
AC/DC voltage	Single-ended, short circuit protected
Output impedance	10 ohm typical
Linear output	10 V pk
Current output	10 mA, minimum
Output DC bias stability temp	±5 μV/°C RTI or ±0.1 mV/°C RTO
Output DC bias stability time	±20 μV RTI or ±5 mV RTO, whichever is greater, for 24 hours, after a 1 hour warmup
Excitation voltage	0, 5.0, 10.0, or 15.0 VDC, front panel or computer selected; 1 selection for all 3 channels
Excitation voltage accuracy	±1%
Excitation current	30 mA maximum, short circuit protected
Noise and ripple	1 mV rms maximum, 10 Hz to 50 kHz, with 1 kOhm load
Transfer characteristics	
Gain	
Range	Programmable from 0 to 1000
Resolution	0.0025, 0 ≤ gain ≤ 10 0.025, 10 ≤ gain ≤ 100 0.25, 100 ≤ gain ≤ 1000
Accuracy	±0.5% of full scale maximum, DC to 1kHz, filters disabled
Linearity	0.1% of full scale, best fit straight line at 1 kHz reference
Stability	±0.2% of full scale, 0°C to +50°C
Noise	20 μV rms RTI plus 1 mV rms RTO, whichever is greater, DC to 50 kHz, with a 1 kOhm source resistance unit in Non-monitoring state, 10 kHz internal lowpass filter enabled
Broadband frequency response	±5%, DC to 50 kHz, referenced to 1 kHz; -3 dB at 200 kHz
Filter characteristics/type	4-pole Butterworth
Corner frequency (-3 dB)	10 kHz ±12% (other corners available by changing internal module 31875: 10 Hz to 80 kHz)
Crosstalk between channels	80 dB RTI
Power requirements	
Voltage	Standard unit: 90-264 VAC 50 to 60 Hz; -1 option: 9-18 VDC
Power dissipation	10 Watts typical
Isolation	No isolation channel to channel or signal ground to caseground
Physical characteristics	
Dimensions	5.57" x 2.52" x 12"
Weight	4 lbs typical
Case	Black aluminum cover, medium grey plastic bezel

DC amplifier | Model 136

Accessories		
Product	Description	136
IM136	Instruction manual	Download from website
EW599	Power cord	Included
31875-1000	10 kHz, 4 pole, Butterworth lowpass filter module	Included
31875-XXXX	Lowpass filter modules (see 31875 data sheet)	Optional
31979	Rack mount kit	Optional
EHM1471	Blank panel	Optional
EHM1413	Desktop DC power supply	Optional
EHM1409	Automotive power plug (Supplied with 136-1)	Included
EJ724-U	DB9 connector kit	Included

Notes

1. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

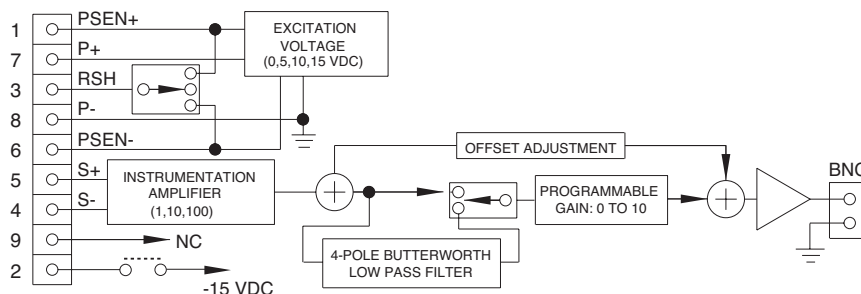

www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLineSM is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

070820



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit www.endevco.com for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.