


Isotron® accelerometer

Model 44A

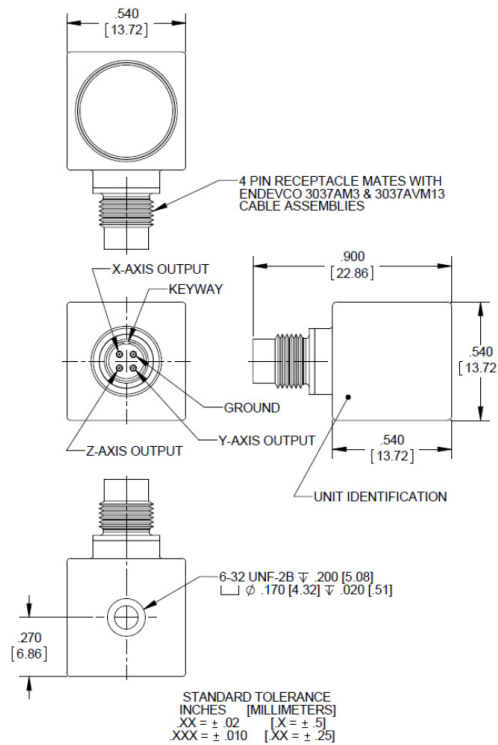

Key features

- General purpose triaxial Isotron® accelerometer
- Single, threaded 1/4-28 4 pin connector
- Wide frequency bandwidth
- Hermetically sealed
- Small 14mm cube size
- Lightweight 13 grams
- IEEE P1451.4 TEDS capable

Model 44A is a cost effective general purpose triaxial Isotron accelerometer designed for use in a variety of applications. 44A is a 14 mm cube shaped Isotron accelerometer, featuring a single threaded 1/4-28 4 pin connector. The unit is hermetically sealed against environmental contamination.

Model 44A features an annular shear ceramic crystal which exhibits excellent output stability over time. The accelerometer incorporates an internal hybrid circuit with TEDS in a two-wire IEPE system which transmits its low impedance voltage output through the same cable that supplies the constant current power. Signal ground is connected to the outer case of the unit. Isolated mounting studs are available. Polarity inversion protection for the hybrid circuit is inherent in the circuit design.

44A is available in four sensitivities designated by a two digit suffix. The 44A13 has a sensitivity of 10 mV/g, the 44A14, 44A15 and 44A16 have sensitivities of 25 mV/g, 50 mV/g and 100 mV/g respectively. The customer may select the mounting stud size included standard with the unit. The available stud sizes are 10-32, 1/4-28, M5 and M6. The stud size is designated following a dash after the model number.

This product is fully compliant to the European Union's Low Voltage Directive, 2006/95/EC and EMC Directive 2004/108/EC and is eligible to bear the CE Mark.

Isotron[®] accelerometer

Model 44A

Specifications

The following performance specifications conform to ISA-RP-37.2 and are typical values, referenced at +75°F (+24°C), 4 mA, and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

Dynamic characteristics	Units	44A13	44A14	44A15	44A16
Range	g	±500	±200	±100	±50
Sensitivity					
±10%	mV/g	10	25	50	100
Frequency response					
Resonance frequency					
Typical	kHz			25	
Minimum	kHz			18	
Amplitude response					
±5% y, z-axis	Hz			0.5 to 5000	
±5% x-axis	Hz			0.5 to 3000	
±1dB all axes	Hz			0.3 to 6000	
Phase response					
±5°	Hz			5 to 1500	
Sensitivity deviation over temperature					
-67°F to +257°F [-55°C to +125°C]	%			5 to 15	
Transverse sensitivity	%			≤5	
Amplitude linearity	%			<1	

Electrical characteristics

Output polarity		Acceleration directed into base produces positive output			
DC output bias voltage					
Room temperature +75°F (+24°C)	Vdc	+11.4 to +13.0			
-67°F to +257°F [-55°C to +125°C]	Vdc	+8.0 to +15.5			
Output impedance	Ω	<100			
Noise floor					
Broadband					
1Hz to 10 kHz	µg rms	200	80	80	50
Spectral					
1Hz	µg/√Hz	140	64	60	38
10 Hz	µg/√Hz	17	8	10	6
100 Hz	µg/√Hz	4	2	2	1
1000 Hz	µg/√Hz	2	0.8	0.8	0.5
Grounding method		Signal ground connected to case			
Power requirements					
Supply voltage [1]	Vdc	+24 to +30			
Supply current	mA	+2 to +20			
Warm-up time [2]	s	2	3	5	10
Digital communications (TEDS) device		DS2431x+u			

Environmental characteristics

Temperature range, operating [3]		-67°F to +257°F [-55°C to +125°C]			
Humidity		Hermetically sealed			
Vibration limit (sinusoidal motion) [4]	g	1000			
Shock limit [5]	g pk	5000			
Base strain sensitivity at 250 µstrain	g/µstrain	0.001			
Electromagnetic	equiv g pk/µstrain	0.005			

Physical characteristics

Dimensions		See outline drawing			
Weight	gram (oz)	13 (0.46)			
Case material		Titanium			
Connector		1/4-28 4 pin			
Mounting method		Threaded stud			
Mounting stud torque, recommended					
10-32 and M6 studs	lbf-in (N-m)	18 (2)			
M5 stud	lbf-in (N-m)	13 (1.5)			
1/4-28 stud	lbf-in (N-m)	30 (3.5)			


Calibration data supplied

Sensitivity	mV/g				
Frequency response					
Amplitude response	%	20 Hz to 5 kHz, y and z axis			
	%	20 Hz to 3 kHz, x axis			
DC output bias voltage	Vdc				

Isotron[®] accelerometer

Model 44A

Model number definition

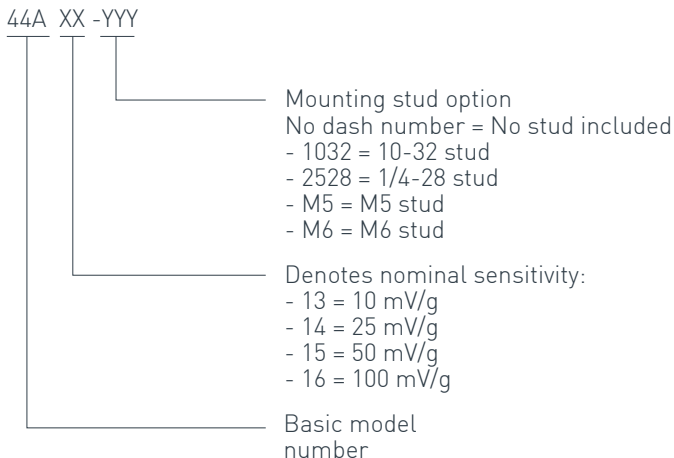

Contact

ENDEVCO

www.endevco.com

Tel: +1 (866) ENDEVCO

[+1 (866) 363-3826]

Accessories

Product	Description	44AXX	44AXX-1032	44AXX-2528	44AXX-M5	44AXX-M6
C-003-CA-005-ZZZZ [6]	Cable assembly 4 pin to 3 BNC	Optional	Optional	Optional	Optional	Optional
3027AM3-ZZZ [6]	Cable assembly 4 pin to 3 BNC	Optional	Optional	Optional	Optional	Optional
3027AVM13-ZZZ	Cable assembly 4 pin to 4 pin	Optional	Optional	Optional	Optional	Optional
42677-1	Mounting stud 6-32 to 10-32	Optional	Included	Optional	Optional	Optional
42677-2	Mounting stud 6-32 to 1/4-28	Optional	Optional	Included	Optional	Optional
42677-4	Mounting stud 6-32 to M5	Optional	Optional	Optional	Included	Optional
42677-3	Mounting stud 6-32 to M6	Optional	Optional	Optional	Optional	Included
42674-1	Isolated mounting stud 6-32 to 10-32	Optional	Optional	Optional	Optional	Optional
42674-2	Isolated mounting stud 6-32 to 1/4-28	Optional	Optional	Optional	Optional	Optional
42674-3	Isolated mounting stud 6-32 to M6	Optional	Optional	Optional	Optional	Optional
42674-4	Isolated mounting stud 6-32 to M5	Optional	Optional	Optional	Optional	Optional
42675-2	Isolated adhesive mounting adapter	Optional	Optional	Optional	Optional	Optional

Notes

- Applications requiring a supply voltage of 20V, the full scale output voltage will be $\pm 5V$ (at room temperature). Applications requiring a supply voltage of 18V, the full scale output voltage will be $\pm 3V$ (at room temperature).
- DC bias within 10% of final value.
- TEDS device operational temperature range is $-40^{\circ}F$ to $+185^{\circ}F$ ($-40^{\circ}C$ to $+85^{\circ}C$). TEDS device will survive full operational range of accelerometer.
- Destructive limit.
- Destructive limit. Shock is a one-time event. Shock pulses of short duration may excite transducer resonance. Shock level above the sinusoidal vibration limit may produce temporary zero shift that will result in erroneous velocity or displacement data after integration.
- ZZZ or ZZZZ designates cable assembly length in inches.
- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.



Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability. 091019