


Airborne charge amplifiers

Model 2680M1-M7

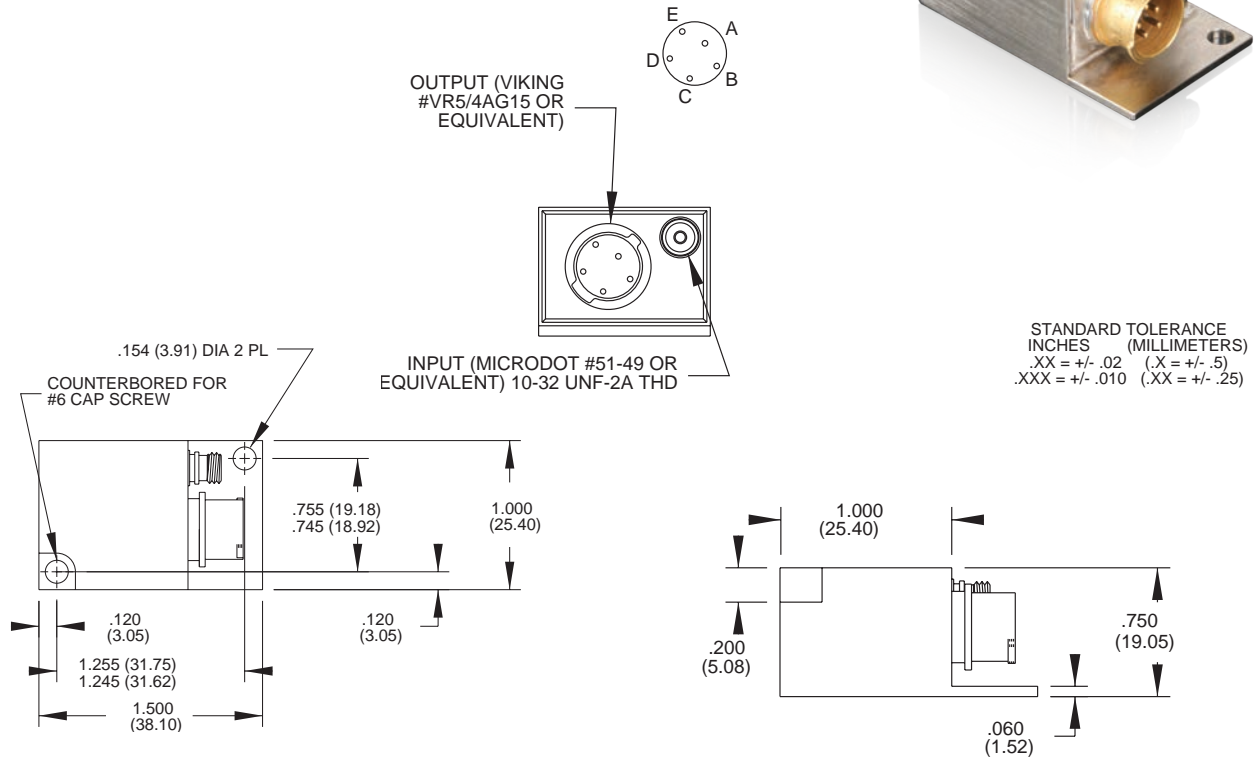

Key features

- For use with piezoelectric transducers
- Small, rugged, light weight
- Dual outputs, biased and unbiased
- Adjustable gain
- Optional low pass filter

Description

Models 2680M1-XXX through 2680M7-XXX charge amplifiers are designed for use with piezoelectric transducers and are suitable for airborne applications. Hybrid microcircuit construction results in small size, ruggedness and low power consumption. The airborne charge amplifiers have an output voltage proportional to the input charge. As a result, the amplifier sensitivity is not appreciably affected by the capacitance of the input cable.

The use of modular construction techniques permits great versatility in gain and filter choices. This unit has two outputs, a biased output and an unbiased output. Both outputs are adjustable with a common gain control. The M1 through M7 defines the charge gain per Table 1.

The -XXX describes the upper cutoff frequency (-5% point) per Table 2. For example, a -101 has a low pass filter which is flat up to 100 Hz, a -502 has a low pass filter which is flat up to 5000 Hz.

Airborne charge amplifiers | Model 2680M1-M7

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.



Specifications	
Inputs	
Type	Piezoelectric single-ended with one side connected to signal ground
Source resistance	3 M Ω minimum
Source capacitance	10 000 pF max
Overload recovery	A half sine pulse of 1ms duration and with an amplitude as specified in Table 1 (or less) will cause no spurious effects at the amplifier output other than clipping.
Outputs	
Type	Both biased and unbiased outputs are single-ended with one side connected to circuit ground.
Load impedance	The parallel combination of both outputs load resistors shall be 10 k Ω or greater to meet all specifications.
Output impedance	Biased output 50 Ω max, direct coupled Unbiased output 50 Ω max, in series with at least 16 μ F
DC output bias voltage	Biased output 2.50 V \pm 3% with load resistances of 10 k Ω minimum Unbiased output 0.00 V +0.050 V / -0.00 V
Linear output voltage	Biased output 4.65 V pk-pk minimum with 10 k Ω load Unbiased output 4.65 V pk-pk minimum with 1 M Ω load 4.25 V pk-pk minimum with 10 k Ω load
Limited output voltage (biased output)	0.00 V +0.075/-0.000 V and 5.30 V +0.00/-0.30 V
Limited output current (both output)	0.465 mA pk-pk minimum with 10 k Ω load
Transfer Characteristics	
Gain range	Adjustable as specified in Table 1
Gain stability	0.05% maximum change per 1000 pF change in source capacitance at the input
Gain stability with supply voltage	0.25% maximum with changes in supply voltage over the specified limits
Frequency response	The gain at the upper and lower cutoff frequencies is 5% lower than the gain at 20 Hz. See Table 2.
Amplitude linearity	\pm 0.5% of reading from best fit straight line approximation
Residual noise	0.01 pC rms + 0.01 pC rms per 1000 pF RTI or noise RTO as specified in Table 1 whichever is greater, when measured over a bandwidth of 3 Hz to 20 kHz
Shock and vibration sensitivity	0.01 pC/g maximum RTI
Environmental Characteristics	
Temperature	Operating -67°F to 212°F (-55°C to 100°C) Storage -99°F to 257°F (-73°C to 125°C)
Humidity	100% R.H. when sealing screw is soldered. Meets MIL-STD-810D, Method 507.2, Procedure III
Altitude	No effect when sealing screw is soldered.
Vibration	120 mils D.A. 5 Hz to 55 Hz 20 g 55 Hz to 2000 Hz
Shock 100 g	6.5 millisecond sawtooth
EMC capability	The unit meets the requirements of the following specifications: MIL-STD-826, CLASS Am; MIL-I-6181D; MSFC-SPEC-279, CLASS 1; AF/BSA EXHIBIT 62-87
Power	
Voltage	20 to 32 VDC (28 VDC nominal)
Current	20 mA maximum for unfiltered units, 25 mA maximum for filtered units
Polarity protection	Not damaged by a polarity reversal of the 28 V supply
Case isolation	Case and signal grounds isolated from each other by 50 M Ω or greater at 50 VDC
Physical Characteristics	
Dimensions	1.00" l x 1.00" w x 0.75" h (25.4 mm x 25.4 mm x 19.1 mm) exclusive of mounting flange and connectors
Mounting	Unit mounts with two 6-32 screws
Case material	Aluminum with electroless nickel plate finish
Weight	1.2 oz (34 gm) maximum
Connectors	Input 10-32 coaxial Output Viking VR5/4AG15. Pin A is the 28 VDC, Pin B unbiased output, Pin C put, Pin D power and signal ground, Pin E case ground

Airborne charge amplifiers | Model 2680M1-M7

Accessories		
Options	Description	2680M1-M7
21997	Accessory Kit:	
	EP38 - Mating plug (Viking #VP5/4CE6), QTY 1	Included
	EP35 - Hood (Viking #VS4/16C5), QTY 1	Included
	EP31- Potting sleeve (Viking #VS4/16C9), QTY 1	Included
	EHW172 - Lockwasher, #6, QTY 2	Included
	EH293 - Screw, CAP 6-32 X 3/4, QTY 1	Included
	EH535 - Screw, CAP 6-32 X 1/4, QTY 1	Included

Notes

- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
- Model number definition:

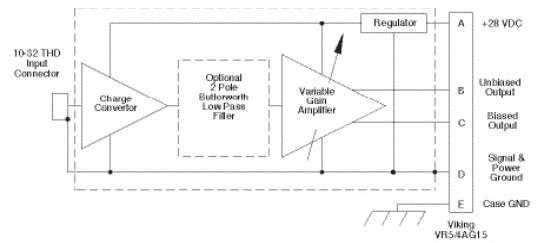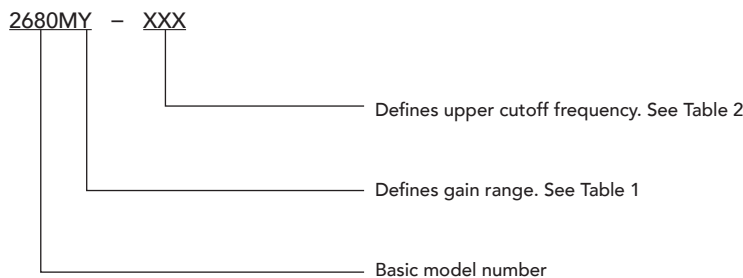

"M" number	Gain range [mV/pC]	Input pulse [pC]	Residual noise [mV rms]
M1	0.1 to 1.0	50 000	1.5
M2	0.2 to 2.0	25 000	1.5
M3	0.5 to 5.0	10 000	1.5
M4	1.0 to 10.0	5000	1.5
M5	2.0 to 20.0	2500	1.5
M6	5.0 to 50.0	1000	1.5
M7	10.0 to 100	500	2.0

Table 1: Gain ranges

Dash No.	Lower cutoff freq. [-5%]	Upper cutoff freq. [-5%]
None	5 Hz	20 kHz (10 kHz for M7)
101	5 Hz	100 Hz
201	5 Hz	200 Hz
501	5 Hz	500 Hz
102	5 Hz	1 kHz
202	5 Hz	2 kHz
502	5 Hz	5 kHz
103	5 Hz	10 kHz
203	5 Hz	20 kHz (10 kHz for M7)
402	5 Hz	4 kHz
250	5 Hz	25 Hz

Table 2: Frequency response



www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLineSM is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

082620



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit www.endevco.com for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.