


Piezoelectric accelerometer

Model 7704A

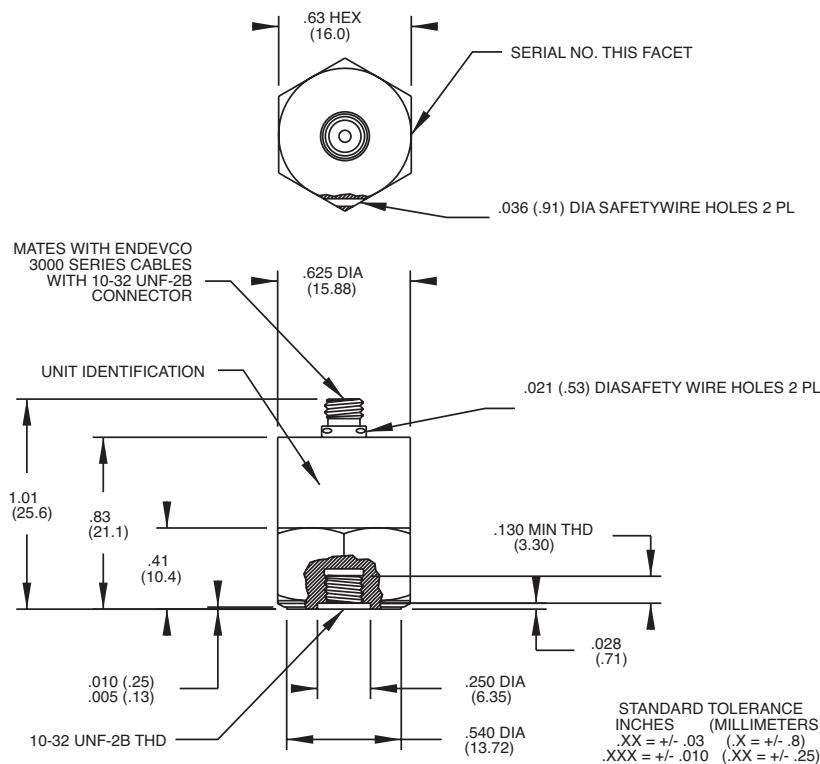

Key features

- High temperature operation up to +550°F (+288°C)
- Hermetically sealed
- Ground isolated
- Top connector
- Radiation tested to 10⁹ rads

Description

Model 7704A-XXXX Isoshear piezoelectric accelerometer is designed for general vibration measurement on structures and objects. The Isoshear design is extremely stable and insensitive to such environmental inputs as base bending and thermal transients. This accelerometer has been tested in a radiation environment up to 108 rads without performance degradation. It is also capable of accurate vibration measurement up to +550°F (+288°C). This unit is hermetically sealed against external contamination. The accelerometer is a self-generating device that requires no external power source for operation.

7704A-XXXX features Endevco's Piezite® Type P-8 crystal element, operating in shear mode. Signal ground is isolated from the outer case of the unit. The accelerometer features a 10-32 top-connector. A low-noise coaxial cable is supplied for error-free operation. The model number suffix indicates acceleration sensitivity in pC/g; i.e., 7704A-100 features output sensitivity of 100 pC/g.

Piezoelectric accelerometer | Model 7704A

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.



Specifications			
Dynamic characteristics	Units	-50	-100
Charge sensitivity			
Typical	pC/g	50	100
Minimum	pC/g	45	90
Frequency response [4]		See typical amplitude response	
Resonance frequency	kHz	26	20
Amplitude response			
±5%	Hz	1 to 6,000	1 to 5,000
±1 dB (ref.)	Hz	1 to 9,000	1 to 8,000
Temperature response		See typical curve	
Transverse sensitivity	%		< 3
Amplitude linearity	%	1/250 g	1/125 g
Up to vibration limit			
Output characteristics			
Output polarity		Acceleration directed into base of unit generates positive output at the center socket of receptacle	
Resistance [2]	GΩ		< 10
Isolation	GΩ		< 1
Capacitance	pF		2800
Grounding		Signal return isolated from case	
Environmental characteristics			
Temperature range		-67°F to +550°F (-55°C to +288°C)	
Humidity		Hermetically sealed	
Sinusoidal vibration	g pk	2,000	1,000
Shock limit [3]	g pk	10,000	5,000
Base strain sensitivity at 250 μstrain	eq. g pk/μstrain	0.0016	0.0008
Electromagnetic sensitivity	eq. g rms/gauss	0.0002	0.0002
Thermal transient sensitivity	eq. g/°F (/ °C)	0.004	0.003
Radiation			
Integrated Gamma Flux	rad		Up to 10 ⁸
Thermal transient sensitivity	N/cm ²		Up to 10 ¹⁰
Physical characteristics			
Dimensions		See outline drawing	
Weight	oz (gm)	0.9 (25)	1.0 (29)
Case material		Stainless steel	
Connector		Coaxial receptacle with 10-32 UNF threads designed to mate with Endevco model 3000 series cable	
Mounting Torque	lbf-in (Nm)		18 (2)
Calibration data			
Supplied			
Charge sensitivity	pC/g		
Capacitance	pF		
Maximum transverse sensitivity	%		
Charge frequency response	%	20 Hz to 6 kHz	20 Hz to 5 kHz
	dB	6 kHz thru resonance	5 kHz thru resonance

Piezoelectric accelerometer | Model 7704A

Accessories		
Product	Description	7704A
3090C-120	Cable assembly, 10 ft	Included
2981-12	Mounting stud, 10-32 to 10-32	Included
EM464	Hex key wrench	Included
3076M6-120	Cable assembly, for use above +500° F, 10 ft	Optional
2981-4	Mounting stud, 10-32 to m5	Optional
2981-3	Mounting stud, 10-32 to 10-32	Optional
2771C	In-line charge converter	Optional
2950	Triaxial mounting block	Optional
133	Signal conditioner	Optional

Notes

1. Low-end response of the transducer is a function of its associated electronics.
2. Prolonged exposure at maximum temperature may decrease the return to room temperature resistance to as low as 25 MΩ but will not degrade the overall performance of the unit. All units are processed to initially meet 10 GΩ at room temperature.
3. Short duration shock pulses, such as those generated by metal-to-metal impact, may excite transducer resonance and cause linearity errors. Read TP290 for more details.
4. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

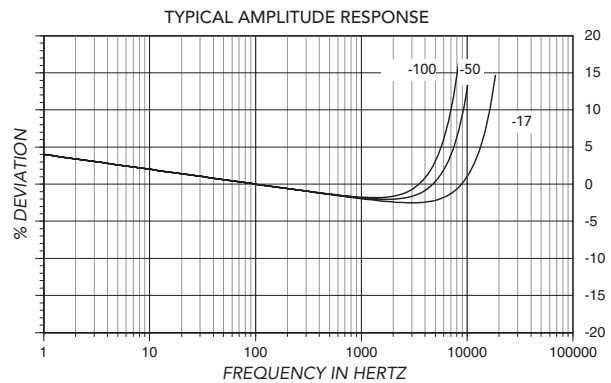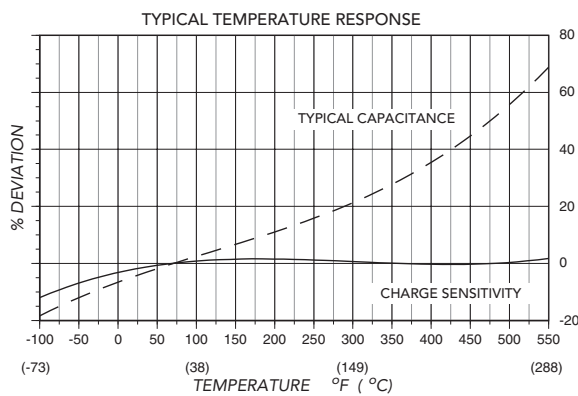

www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLineSM is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

082620



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit www.endevco.com for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.