


# Ultra rugged low noise coaxial cable assembly

## Model 3090CM67

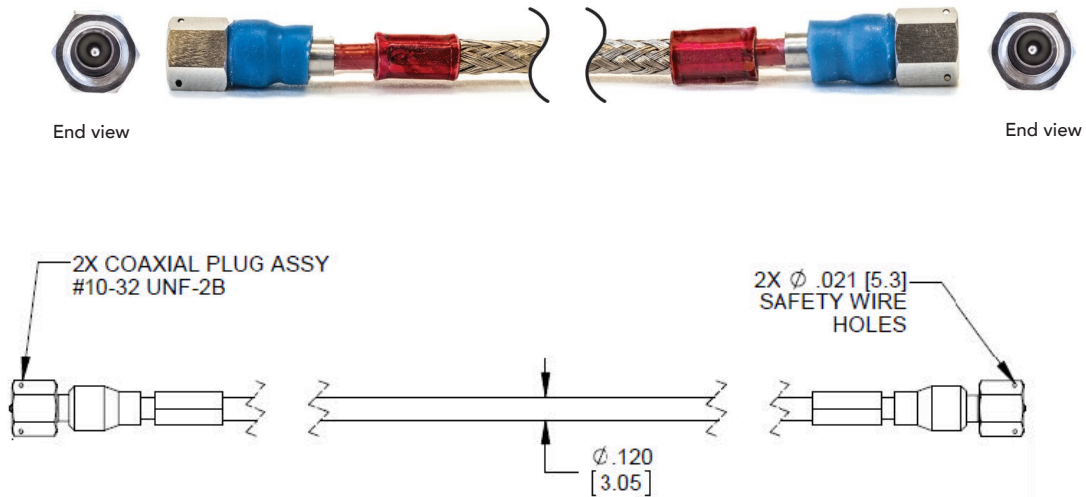

STANDARD TOLERANCE	
INCHES	[MILLIMETERS]
.XX = ± .02	[.X = ± .5]
.XXX = ± .010	[.XX = ± .25]

### Key features

- For use with high impedance, charge mode accelerometers
- Metallic overbraid for abrasion protection
- Aramid fiber reinforced jacket for high tensile strength
- Critical parameters 100% tested

### Description

The model 3090CM67 cable assembly is a low-noise coaxial cable designed for use with charge mode accelerometers in the most severe environments. The cable assembly derives its strength from the metallic braided jacket and an aramid fiber reinforcement braid. The hermetic connectors are made of stainless steel and a glass dielectric providing maximum reliability and moisture protection.

The raw cable and connectors are made in-house to ensure the highest quality product available, making this cable assembly unique to the industry. Critical parameters are 100% tested including triboelectric noise. .

## Low noise coaxial cable assembly | Model 3090CM67

The following specifications are typical and taken at approximately 75°F (24°C) unless otherwise noted.

Specifications		
Dynamic characteristics	Units	3090CM67
Connector		
Connector 1 and 2		10-32 NF plug
Dielectric material		Glass
Pin material		304 stainless steel
Connector material		304 stainless steel
Strain relief material		Fluorosilicone rubber
Torque	in-lbs (Nm)	10 (1.13)
Weight	lbs (gms)	0.01 (4.5)
Lock wire holes		Yes
<b>Cable</b>		
Color (5)	Red	
Outer jacket		Metallic braid, nickel plated copper
Under jacket		PTFE
Reinforcement		Aramid fiber
Conductors		1
Conductor material		Silver plated annealed copper
Conductor size	AWG	30
Primary insulation		Teflon
Cable type		Coaxial
Diameter	in (mm)	0.120 (3.05)
Shield material		Silver plated copper
Cable weight	lbs, gms/foot	0.01 (4.5), minimum
Bend radius	in (mm)	0.850 (21.6)
Raw cable part number (3)		PN 30285
<b>Environmental characteristics</b>		
Minimum temperature	°F (°C)	-67 (-185)
Maximum temperature	°F (°C)	500 (260)
Pin pullout	lbs (kg)	33 (15)
Cable pull strength	lbs (kg)	>100 (45)
Shock	g peak	1000 max
Random vibration (1)	g rms	20.7
Sinusoidal vibration (1)	g peak	100
<b>Electrical characteristics</b>		
Noise (2)	pC pk - pk	1.5
Cable capacitance (2)	pF/ft	35 max
Insulation resistance (2)	G Ω	50, up to 500 ft

## Low noise coaxial cable assembly | Model 3090CM67

Length tolerance tabulation	
Length inches (millimeters)	Tolerance inches (millimeters)
Up to 12 (304.8)	+ 1.0 (25.4)
13 to 36 (330.2 to 914)	+ 2.0 (50.8)
37 to 120 (939.8 to 3.05 meters)	+ 4.0 (101.6)
Over 120 (3.05 meters)	+4 (101.6) per 120 (3.05) or part thereof (+12 (3.05) = maximum tolerance)

### Notes

1. For high g level vibration, the hex nut should be well tightened beyond finger tight to a maximum of 10 in-lb. The cable should be secured down as close as possible to the connector to prevent whipping and resonance. This will significantly improve vibration life.
2. These parameters are 100% tested.
3. This part number does not include the cable overbraid. The overbraid is included on the cable assembly.
4. STEP file available upon request.
5. Small color variations may occur during normal batch processing but will have no impact on product performance.

### Ordering information

1. Specify 3090CM67-XXX where XXX = cable length, in inches
2. Standard lengths, in inches, are 12, 120, 240, 360, and 600
3. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.



10869 NC Highway 903, Halifax, NC 27839 USA

endevco.com | sales@endevco.com | 866 363 3826