
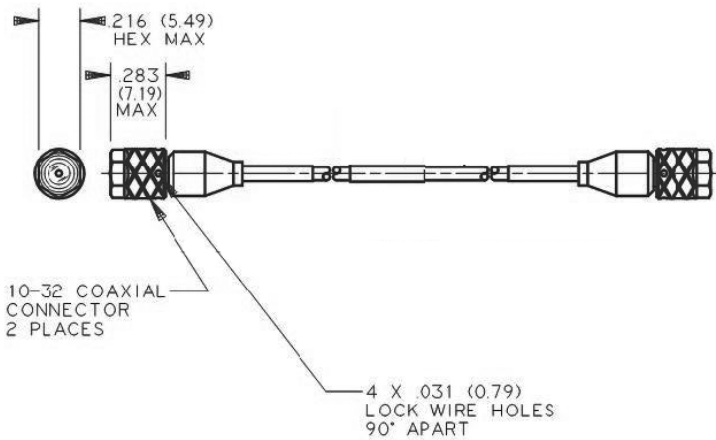


Endevco®

Premium low noise coaxial cable assembly

Model 3090DV

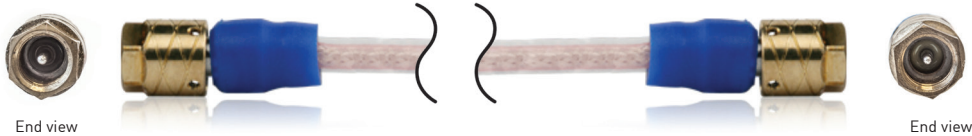

OUTLINE DRAWING

STANDARD TOLERANCE
INCHES (MILLIMETERS)
.XX = ± .03 (X = ± .8)
.XXX = ± .010 (XX = ± .25)

The 3090DV is a uniquely designed premium low-noise cable for use with charge mode piezoelectric accelerometers. The extruded cable jacket and hermetic connectors make this cable ideal for use in high humidity environments. Because of the rugged construction, this cable can be used in a wide range of applications including laboratory, space, launch vehicles and other severe environments.

The cable connectors are manufactured in-house using a glass-fused dielectric providing a hermetic seal and superior mechanical strength. The hermetic connector, along with the extruded cable, provides an outstanding device for use in humid environments. The center conductor pin is welded (not crimped) to the cable's center conductor providing maximum strength and low noise. All critical parameters are 100% tested and the cable capacitance is measured and recorded; an important parameter for long cable lengths.

Key features

- Extruded outer jacket
- Critical parameters 100% tested
- Anti-galling coupling nut
- Lightweight
- Highest reliability for mission critical applications

Meggitt Sensing Systems

Our measurement product competencies:

Piezoelectric accelerometers | Piezoresistive accelerometers | Isotron accelerometers | Variable capacitance accelerometers | Pressure transducers | Acoustic sensors | Electronic instruments | Calibration systems | Shakers | Modal hammers | [Cable assemblies](#)

MEGGITT
smart engineering for
extreme environments



Endevco®

Premium low noise coaxial cable assembly

Model 3090DV

Specifications

All specifications are typical and taken at 75°F (24°C) unless otherwise noted.

	Units	3090DV
Connector		
Connector 1		10-32 NF, 0.216 [5.49]
Connector 2		10-32 NF, 0.216 [5.49]
Dielectric material		Glass
Pin material		304L stainless steel
Connector housing material		304 stainless steel
Coupling nut material		High strength bronze alloy (non-galling)
Strain relief material		Fluorosilicone rubber
Torque	In-lbs(Nm)	Finger tight to 1.5 [0.169]
Weight	gms	1.70
Lock wire holes		Yes
Cable		
Color		Translucent red
Outer jacket		Extruded PFA Teflon
Center conductor		Silver plated copper, stranded
Conductor size	AWG	30
Primary insulation		Teflon
Cable type		Coaxial
Diameter	in(mm)	0.081 [2.06]
Shield material		Silver plated copper
Cable weight	gms/ft	2.67
Minimum bend radius	in (mm)	0.750 [19]
Raw cable part number		40204
Environmental		
Minimum temperature, cable and plug [2]	°F (°C)	-432 [-254]
Maximum temperature, cable and plug [2]	°F (°C)	500 [260]
Pin pullout	lbs (kg)	33 [15]
Cable pull strength [1]	lbs(kg)	>20 (>9)
Shock	g peak	10,000
Sinusoidal vibration [3]	g peak	1 000
Random vibration	g rms	20.7
Electrical		
Cable noise [1]	pC pk-pk	1.5
Cable capacitance [1]	pF/ft	32
Insulation resistance [at 100 VDC] [1]	GΩ	>50
Accessories supplied		
End wrench		



Endevco®

Premium low noise coaxial cable assembly

Model 3090DV

Length tolerance tabulation

Length inches (millimeters)	Tolerance inches (millimeters)
Up to 12 (304.8)	+ 1.0 (25.4)
13 to 36 (330.2 to 914)	+ 2.0 (50.8)
37 to 120 (939.8 to 3.05 meters)	+ 4.0 (101.6)
Over 120 (3.05 meters)	+4 (101.6) per 120 (3.05) or part thereof (+12 (3.05) = maximum tolerance)

Notes

1. These parameters are 100% tested
2. For temperature usage below -300°F (-185°C) remove silicone boots
3. For high g level vibration, the hex should be well tightened (beyond finger tight) and the cable should be secured down close as possible to the connector to prevent whipping and resonance. This will significantly improve cable life.

Ordering Information:

1. Specify as 3090DV-XXX where XXX = in inches
2. Standard lengths, in inches, are 12, 60, 120, 240, 360 and 600

Contact

Meggitt Sensing Systems

14600 Myford Road
Irvine
CA 92606, USA
Tel: +1 (949) 493 8181
Fax: +1 (949) 661 7231

www.endevco.com
www.meggitt.com

ISO 9001



APPLIES TO CALIFORNIA FACILITY



Continued product improvement necessitates that Meggitt reserve the right to modify these specifications without notice. Meggitt maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability. 012418

MEGGITT
smart engineering for
extreme environments