


Triaxial variable capacitance accelerometer

Model 7298

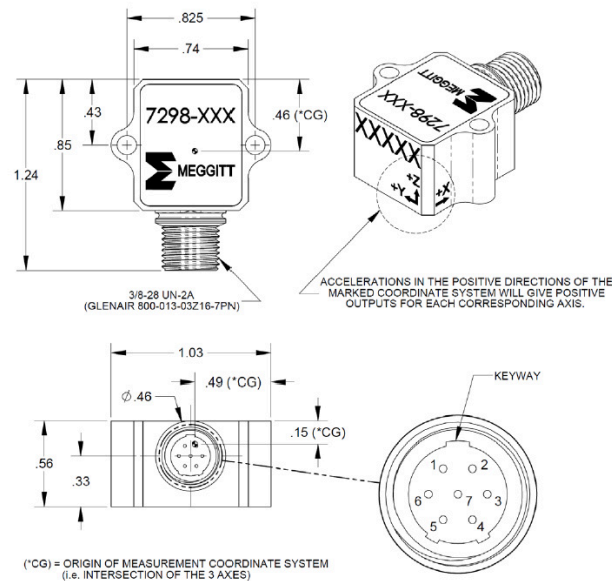

STANDARD TOLERANCE	
INCHES	MILLIMETERS
.XX = ± .02	[X = ± .5]
.XXX = ± .010	[XX = ± .25]

PIN ASSIGNMENT	
1 = +EXC	5 = VREF
2 = -EXC	6 = +Z OUT
3 = +X OUT	7 = +Y OUT
4 = -EXC	

Key features

- Hermetic package with water resistant connector
- 2, 5, 10, 30, 50 and 100 g full scale ranges
- Motion, low frequency, tilt
- 10K g shock survivability
- Full analog signal path
- Precision digital temperature compensation

The Endevco® Model 7298 Triaxial Accelerometer family is designed to provide the high thermal stability and global accuracy that is typically required for the measurement of relatively low-level accelerations in aerospace and automobile environments. Typical applications require the measurement of whole body motion in three mutually orthogonal directions immediately following shock motion or in the presence of severe vibrational inputs. State of the art temperature compensation electronics provide for precise compensation over a wide temperature range, while maintaining a full analog signal path.

Each axis of the triaxial accelerometer utilizes a patented variable capacitance MEMS sensing element. Gas damping and internal overrange stops enable the MEMS sensing element to withstand high shock and acceleration loads. The triaxial sensor arrangement is housed in a truly hermetic bolt-mount package featuring an integral Glenair® Mighty Mouse 800-013 series hermetic receptacle. When used with a mating plug (Glenair® series 800-006 thru 800-009) the connector assembly is protected against water ingress, making the 7298 an ideal choice for permanent installations in hose-down locations.

Internal signal conditioning allows the 7298 to operate from an excitation voltage from 6Vdc to 45Vdc while providing a high level, low impedance output. For each axis, the single-ended output is DC coupled and varies linearly from 0.5Vdc to 4.5Vdc over the input range. For operating in differential mode, a precision 2.5Vdc reference voltage is available at the connector, providing a DC coupled ±2Vdc differential output. The signal conditioning includes factory programmable temperature compensation in order to maintain stringent thermal characteristics and high accuracy. Frequency response is controlled by the use of near-critically damped sensors. As opposed to oil damping, the use of gas damping in the sensing elements results in very small thermally induced changes in frequency response.

U.S. Patents 4,574,327, 4,609,968 and 4,999,735.

Triaxial variable capacitance accelerometer

Model 7298

Specifications

All values assume +75°F (+24°C) and 15 Vdc excitation and apply to each of the three axes, unless otherwise stated. Calibration data traceable to National Institute of Standards and Technology (NIST) is supplied.

Dynamic characteristics	Units	-2	-5	-10	-30	-50	-100
Range	g	±2	±5	±10	±30	±50	±100
Sensitivity	mV/g	1000 ±50	400 ±20	200 ±10	66 ±4	40 ±2	20 ±1
Frequency response (± 5%)	Hz	0 to 15	0 to 30	0 to 500	0 to 1000	0 to 1500	0 to 1500
Mounted resonance frequency	Hz typ.	1300	1600	3000	5500	6000	6000
Non-linearity and hysteresis [1]	% FSO typ (max)	±0.5 (±1.0)	±0.5 (±1.0)	±0.5 (±1.0)	±0.5 (±1.0)	±1 (±2)	±1 (±2)
Transverse sensitivity	% (max)	1 (3)	1 (3)	1 (3)	1 (3)	1 (3)	1 (3)
Zero measurand output	mV	±50	±50	±50	±50	±50	±50
Damping ratio	% typ	3.0	2.5	0.7	0.7	0.6	0.6
Damping ratio change							
From -65°F to +250°F (-55°C to +121°C) %/°C		+0.08	+0.08	+0.08	+0.08	+0.08	+0.08
Thermal zero shift (max)							
From -40°F to 212°F (-40°C to 100°C)	% FSO		±1.0	±1.0	±1.0	±1.0	±1.0
±1.0							
Thermal sensitivity shift (max)							
From -40°F to 212°F (40°C to +100°C) %		±1.0	±1.0	±1.0	±1.0	±1.0	±1.0
Overrange (determined by electrical clipping or mechanical stops, whichever is smaller.)							
Electrical clipping	volts	±2.4	±2.4	±2.4	±2.4	±2.4	±2.4
Mechanical stops	g (typ)	±4	±12	±30	±90	±90	±200
Recovery time	µs	< 10	< 10	< 10	< 10	< 10	< 10
Threshold (resolution) [2]	Equiv. g's	0.0005	0.0013	0.0025	0.0075	0.013	0.013
Base strain sensitivity, max	Equiv. g's (max)	0.01	0.01	0.01	0.01	0.01	0.01

Electrical characteristics

Excitation voltage	Vdc	6.0 to 45.0					
Current drain	mA	12 (typ) 16 (max)					
Output impedance/load	ohms	120 max					
Residual noise	mVrms	0.5 to 1000Hz, 0.3 typ/0.5 max					
	mVrms	0.5 to 10 000Hz, 0.5 typ/1.0 max					

Physical characteristics

Case material	Stainless steel						
Connector	Glenair® Mighty Mouse 800-013-03216-7PN						
Mounting/torque	Two holes for 4-40 mounting screws / 8 ±2 ibf-in (0.9 ±0.2 Nm)						
Weight	22 grams (0.8 oz)						

Environmental characteristics

Acceleration limits (in any direction)							
Static	10 000 g						
Vibration	20-2000 Hz 100 g sinusoidal / 40 g rms random						
Shock	5000 g (150 µs haversine pulse) for -2, -5 and -10; 10 000 g (80 µs haversine pulse) for -30, -50, -100						
Zero shift	0.1% FSO typical at 5000 g						
Temperature							
Operating	-67°F to +257°F (-55°C to +125°C)						
Storage	-76°F to +302°F (-60°C to +150°C)						
Humidity/altitude	Unaffected. Unit is hermetically sealed.						
ESD sensitivity	Unit meets Class 2 requirements of MIL-STD-883, Method 3015						

Calibration

Sensitivity	1 g and 5 Hz for -2 and -5; 10 g and 100 Hz for all other ranges						
Frequency response	1 g, 1 to 100 Hz for -2 and -5; 10 g, 20 to 5000 Hz for all other ranges						
Zero measurand output							



Triaxial variable capacitance accelerometer

Model 7298

Accessories


Product	Description	7298
EHW265	Size 4, flat washer (2)	Included
EH69	4-40 x 3/4 inch cap screws (2)	Included
EHM464	Hex key wrench	Included
3907-36	Mating cable assembly, 36"	Optional
3907-120	Mating cable assembly, 120"	Optional

Notes

1. Full scale output (FSO) is nominally 4 volts.
2. Threshold = (max. residual noise; 0.5 to 100 Hz) / sensitivity.

Model number definition

7298 - XXX

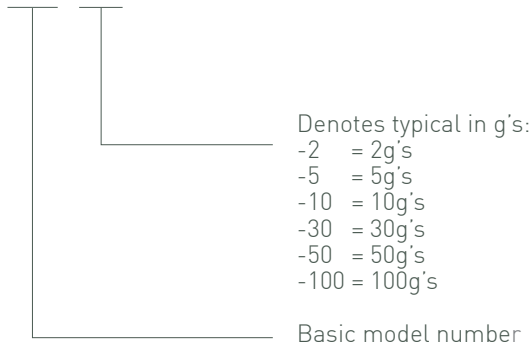

Contact

Meggitt (Orange County) Inc.
 14600 Myford Road
 Irvine
 CA 92606, USA
 Tel: +1 (949) 493 8181
 Fax: +1 (949) 661 7231
www.endevco.com
www.meggitt.com



Continued product improvement necessitates that Meggitt reserve the right to modify these specifications without notice. Meggitt maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.121114

APPLIES TO CALIFORNIA FACILITY